


# In Demand

Trading (Pty) Ltd

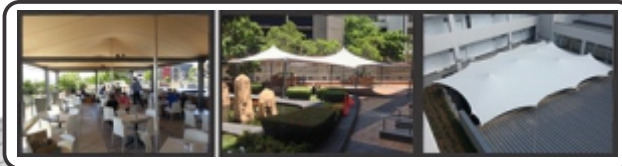

Thermoflex Structures

25 years design experience

**services:** design, structural analysis, shop drawings, manufacture, installation



free standing

### Features:

- thermoflex membrane
- fire retardant membrane
- optional roll up blinds
- full waterproof enclosure

### Wind Rating

- 140 km/hr




## Flying mast

### Features:

- gutters on building side
- multiple masts under one membrane
- clear windows in blinds
- full waterproof enclosure

### Wind Rating

- 140 km/hr

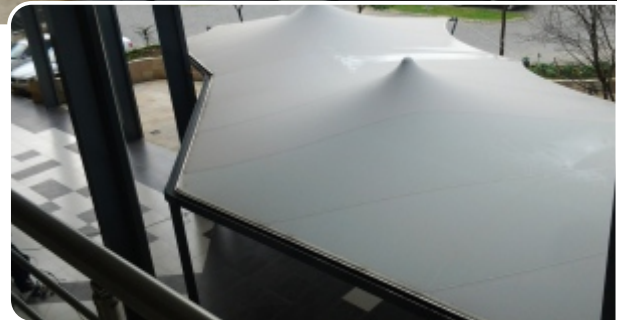



facade



**Features:**

- thermoflex membrane
- fire retardant membrane
- optional roll up blinds
- full waterproof enclosure

**Wind Rating**

- 140 km/hr




## Rolled Arch

**Features:**

- waterproof on building side
- rolled arches
- support cables
- full waterproof enclosure

**Wind Rating**

- 140 km/hr

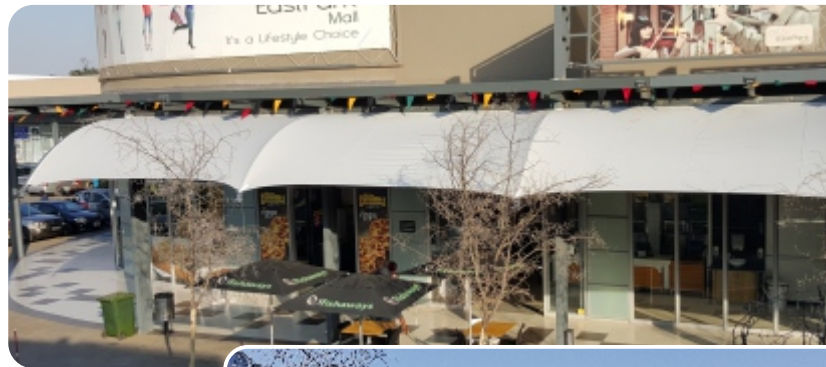



Sail

**Features:**

- thermoflex membrane
- fire retardant membrane
- optional roll up blinds
- full waterproof enclosure

**Wind Rating**

- 140 km/hr




Sail

**Features:**

- waterproof on building side
- curved columns
- support cables
- full waterproof enclosure

**Wind Rating**

- 140 km/hr

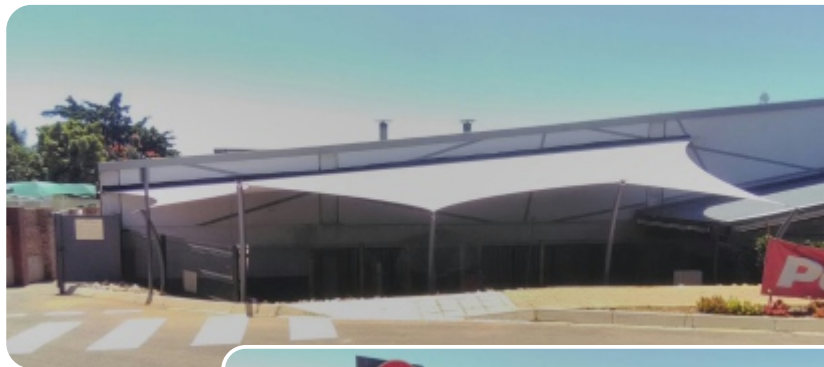



Sail

**Features:**

- thermoflex membrane
- fire retardant membrane
- optional roll up blinds
- full waterproof enclosure

**Wind Rating**

- 140 km/hr




Sail

**Features:**

- waterproof on building side
- attached to wall on front edge with columns
- overlapping sails
- waterproof footprint

**Wind Rating**

- 140 km/hr

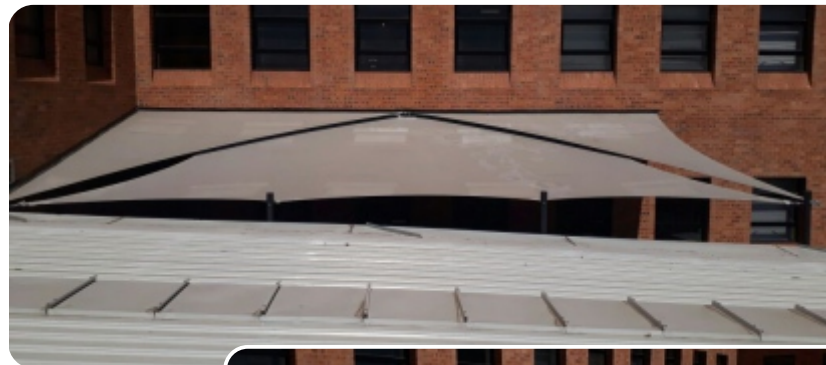



free standing

### Features:

- thermoflex membrane
- fire retardant membrane
- wood clad I-beam columns
- dove grey membrane

### Wind Rating

- 140 km/hr



## Restaurant Area

### Features:

- thermoflex membrane
- fire retardant membrane
- closed edge
- waterproof to building with structural gutter

### Wind Rating

- 140 km/hr





secured to building

### Features:

- thermoflex membrane
- fire retardant membrane
- optional roll up blinds
- full waterproof enclosure

### Wind Rating

- 140 km/hr




## Conference Centre

### Features:

- thermoflex membrane
- fire retardant membrane
- open edges
- waterproof to building with structural gutter

### Wind Rating

- 140 km/hr

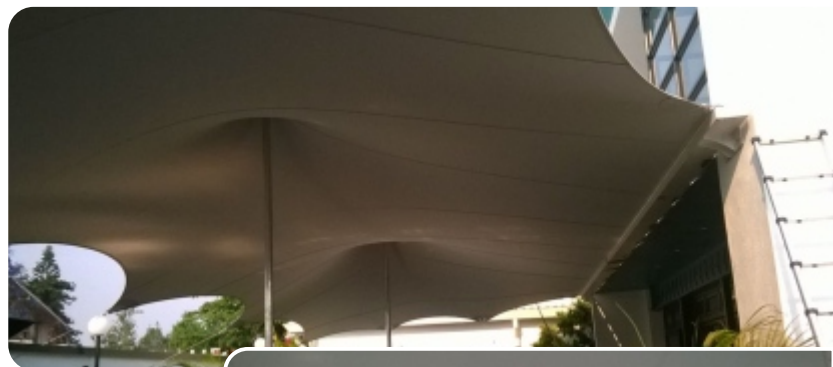



secured to building

### Features:

- thermoflex membrane
- fire retardant membrane
- open edges
- waterproof to building with structural gutter

### Wind Rating

- 140 km/hr




## Conference Centre

### Features:

- thermoflex membrane
- fire retardant membrane
- open edges
- waterproof to building with structural gutter
- can be removed as required
- secured with ratchets to allow easy removal

### Wind Rating

- 140 km/hr

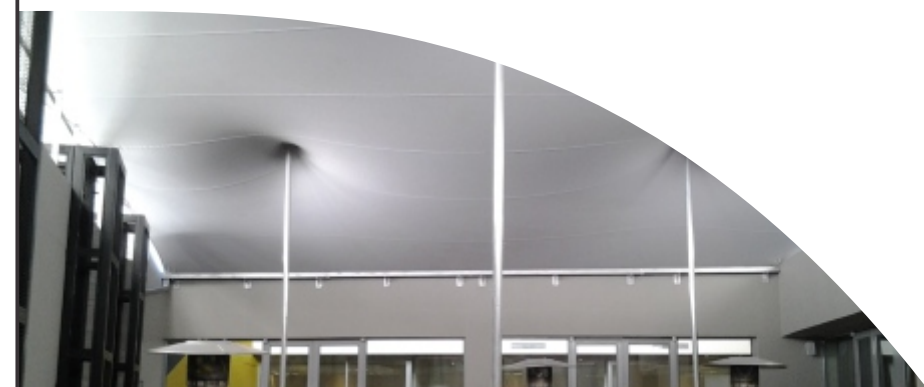



secured to building

**Features:**

- thermoflex membrane
- fire retardant membrane
- secured to wall with angle iron and extrusion
- stainless steel cables to wall on open end

**Wind Rating**

- 140 km/hr



## Vehicle

**Features:**

- thermoflex membrane
- fire retardant membrane
- open edges
- waterproof to building with angle iron

**Wind Rating**

- 140 km/hr



standard design



secured to building

**Features:**

- thermoflex membrane
- fire retardant membrane
- secured to wall with angle iron and extrusion
- stainless steel cables to wall on open end

**Wind Rating**

- 140 km/hr





### Residential patio

**Features:**

- thermoflex membrane
- fire retardant membrane
- open edges
- waterproof to building with angle iron

**Wind Rating**

- 140 km/hr

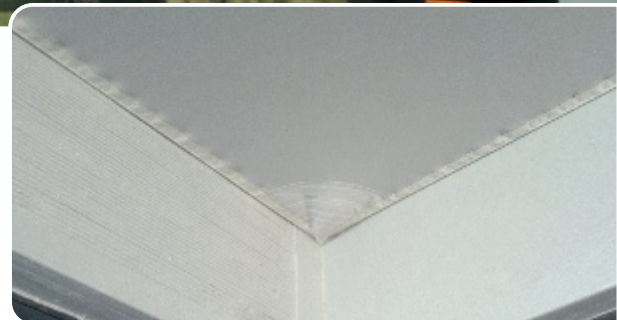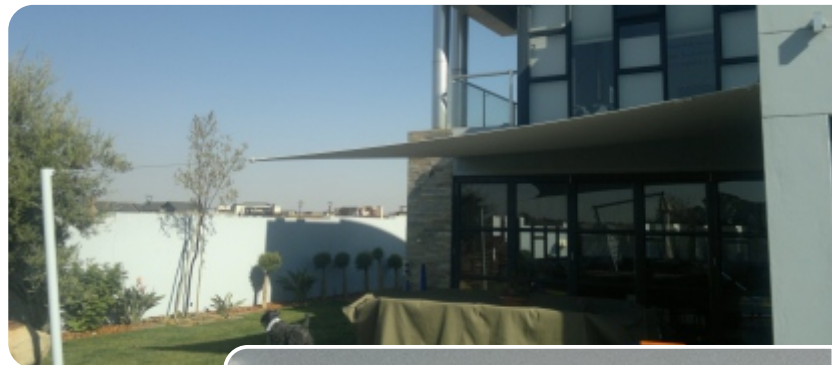




secured to building

### Features:

- thermoflex membrane
- fire retardant membrane
- secured to wall with angle iron and extrusion
- waterproof to building

### Wind Rating

- 140 km/hr

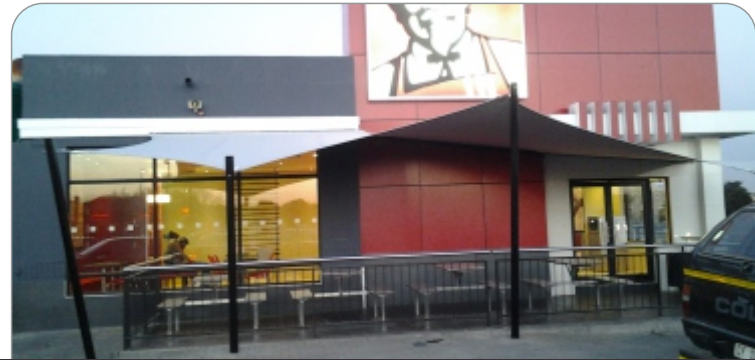


## Food Court

### Features:

- thermoflex membrane
- fire retardant membrane
- laced into gutter
- profiled to fit building shape

### Wind Rating

- 140 km/hr

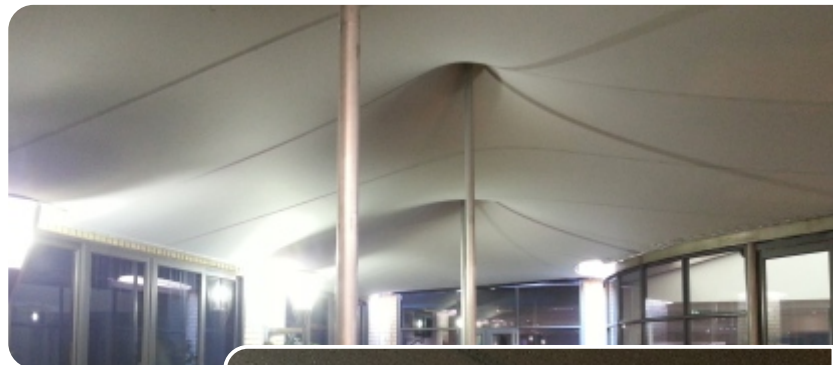



high wind area

### Features:

- thermoflex membrane
- fire retardant membrane
- secured to wall with brackets
- stainless steel stay cables

### Wind Rating

- 140 km/hr



## Uganda

### Features:

- thermoflex membrane
- fire retardant membrane
- open edges
- waterproof to building with angle iron

### Wind Rating

- 140 km/hr





existing lamp poles

### Features:

- thermoflex membrane
- fire retardant membrane
- secured to wall with angle iron
- stainless steel poles in front

### Wind Rating

- 140 km/hr



## Balcoy

### Features:

- thermoflex membrane
- fire retardant membrane
- open edges
- waterproof to building with angle iron

### Wind Rating

- 140 km/hr





gutters around perimeter

### Features:

- thermoflex membrane
- fire retardant membrane
- secured to wall with brackets
- gutters around perimeter

### Wind Rating

- 140 km/hr



## Fast Food Franchise

### Features:

- thermoflex membrane
- fire retardant membrane
- open edges
- waterproof to building with angle iron

### Wind Rating

- 140 km/hr





gutters around perimeter

### Features:

- thermoflex membrane
- fire retardant membrane
- open edges
- waterproof to building with angle iron

### Wind Rating

- 140 km/hr



## Fast Food Franchise

### Features:

- thermoflex membrane
- fire retardant membrane
- fixed edge profiled to balcony shape
- waterproof to building with structural gutter

### Wind Rating

- 140 km/hr





attached to existing trees

### Features:

- thermoflex membrane
- fire retardant membrane
- open edges
- waterproof to building with angle iron

### Wind Rating

- 140 km/hr




## Corporate relaxation

### Features:

- thermoflex membrane
- fire retardant membrane
- open edge free standing
- stainless steel rigging cables

### Wind Rating

- 140 km/hr

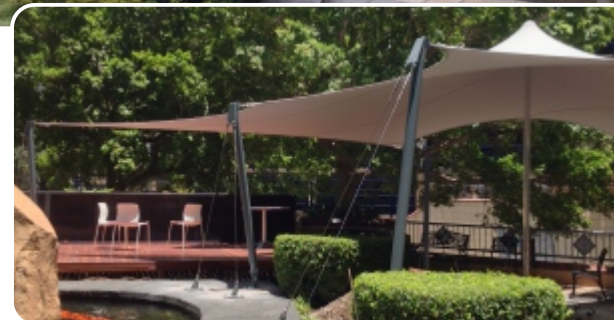



attached to existing trees

### Features:

- thermoflex membrane
- fire retardant membrane
- gutter against building, open edges
- waterproof to building with structural gutter

### Wind Rating

- 140 km/hr



## Corporate relaxation

### Features:

- thermoflex membrane
- fire retardant membrane
- open edge free standing
- stainless steel rigging cables

### Wind Rating

- 140 km/hr





wood column

### Features:

- thermoflex membrane
- fire retardant membrane
- gutter against building, open edges
- waterproof to building with structural gutter

### Wind Rating

- 140 km/hr



## Square edge

### Features:

- thermoflex membrane
- fire retardant membrane
- square tubing edge
- water runs off onto pavement

### Wind Rating

- 140 km/hr





light rigging & poles

**Features:**

- thermoflex membrane
- fire retardant membrane
- light columns and light rigging
- no wet works but using existing infrastructure

**Wind Rating**

- 90 km/hr



## El Cheapo

**Features:**

- thermoflex membrane
- fire retardant membrane
- light columns and light rigging
- no wet works but using existing infrastructure

**Wind Rating**

- 90 km/hr

